SC-18 Gear-Drive
SOD CUTTER

CLASSEN®

FEATURES

- **18” (46 cm) blade standard.** Optional blade assemblies available
- **Center-mounted blade** ensures a more consistent cutting depth
- Cutting blade makes **20 cutting strokes per second**
- **Adjust depth** for ideal sod thickness
- **Knobby tread drive wheels** ensure better traction and reduce dirt build up
- **Optional rear swivel wheel kit** for turning ease
- **Warranty*** 2-year Commercial/Rental

**Engines Warranted Separately by Manufacturer*

www.ClassenTurfCare.com

SC-18 Gear-Drive
SOD CUTTER

ALWAYS MAKES THE CUT.

Advanced cam design for less vibration, the Classen Gear-Drive Sod Cutter makes sod cutting easy; leaving level ground to build a new path, walkway, patio, or to establish new flower beds.

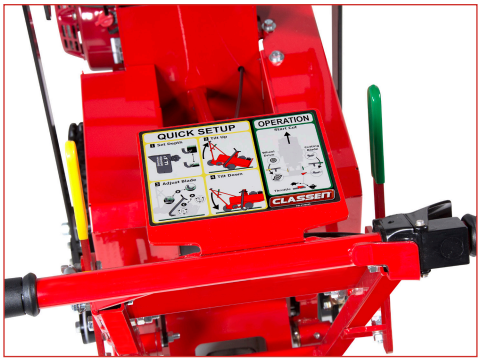

	SC-18A/5.5	SC-18A/8
Engine	Honda® GX160	Honda® GX240
Transmission	Gear Drive	Gear Drive
Fuel Capacity, g (l)	0.8 (3.1)	1.4 (5.3)
Standard Blade Cutting Width, in (cm)	18 (46)	18 (46)
***Max Cutting Depth, in (cm)**	2.5 (6.4)	2.5 (6.4)
Blade Speed Strokes Per Minute	1200	1200
Optional Blade Assemblies, in (cm)	12,16, 20 (30, 40, 51)	12,16, 20, 24 (30, 40, 51, 61)
Front Wheels, in (cm)	8 (20.3) Knobby Molded Rubber	8 (20.3) Knobby Molded Rubber
Rear Wheels, in (cm)	9 (22.9) Semi Pneumatic	9 (22.9) Semi Pneumatic
Dimensions L x W x H, in (cm)	54 x 23 x 34 (137 x 58 x 86)	54 x 23 x 34 (137 x 58 x 86)
Dry Weight, lbs (kg)	304 (138)	344 (157)

*Dependent upon installed blade assembly

/classenturfcare | /ClassenTurfSolutions | @classenturfcare

CLASSEN®

1028 Street Road | Southampton, PA 18966
Phone: 215-357-5110 | Toll Free: 1-877-596-6337

Specifications, descriptions and illustrative material in this brochure are as accurate as known at the time of this publication but are subject to change without notice.

© 2021 Schiller Grounds Care, Inc. All Rights Reserved. 9/2021